

# 微電腦型雙輸入轉速，線速運算型電錶(顯示幕0.8") (MICROPROCESS DUAL INPUT RPM & LINE-SPEED MATHS METER ) (DISPLAY 0.8")

MODEL  
MMX-L

CE



## ■特點(FEATURES)

- 精確度0.01%滿刻度 (Accuracy 0.01% F.S.)
- 可量測 直流脈波/磁性感應器信號(Measuring Pulse(TTL,CMOS), Magnetic pick-up)
- 最大輸入頻率 50KHz(Accepts input rates up to 1KHz)
- 轉速,線速可任意設定(Display type of RPM or line-speed can be modified)
- 線速單位 米, 英呎, 碼/分鐘可任意設定(Display unit M/min,Y/min,ft/min can be modified)
- 感應器輸入脈波數(1~99999)可任意設定(Input pulse of revolution (1~999) can be modified (1~99999))
- 雙輸入運算功能(Dual input math function B-A , B/A , (B/A)-1,1-(B/A), B/(A+B))
- 1組警報功能(One alarm function)(optional)
- 尺寸小、穩定性高(Dimension small and High stability)

## 1.MODEL:MMX-L

(選購型號)


NO	Input Type	NO	Input Type	NO	Alarm output
A	Pulse (TTL) (5V)	E	Magnetic pick-up (50mV~15V)	0	None
B	Pulse (NPN) (12V)	F	AC2~60V	1	One
C	Pulse (PNP) (12V)	G	SPECIFIED		•Relay contact (AC250V-10A,DC30V-10A)
D	Magnetic pick-up (50mV~1.5V)				

## 2.SPECIFICATION (主要規格)

- Aux.power suppler : AC110/220V±20%(50/60Hz)  
(輔助電源)
- Measuring accuracy : 0.01% F.S. (23±5°C)  
(精確度)
- Count input type : Jump-pin selectable current sourcing(NPN) or current sinking (PNP)  
(脈波輸入型式)
- Count input trigger levels : Hi bias (CMOS) (V<sub>IH</sub>=7.5V, V<sub>IL</sub>=5.5V)  
Lo bias (TTL) (V<sub>IH</sub>=3.7V, V<sub>IL</sub>=2.0V)  
(脈波觸發電位)
- Max.count rates : 50KHz (50% duty cycle)  
(最高輸入頻率)
- Sampling time : 10 cycles/sec. (>10Hz)  
f cycles/sec. (<10Hz)  
(取樣時間)
- Over input indication : " doFL "(過載顯示)
- Readout range : 0~99999 digit adjustable  
(顯示值範圍)
- Diameter setting : 0~9.9999M (Touch switches setting)  
(直徑設定範圍)
- Alarm action : HI or Lo adjustable  
(繼電器動作方向)
- Relay contact output : AC 250V-10A, DC 30V-10A  
(繼電器容量)
- Parameter setting : Touch switches  
(參數設方式)
- Display : Red high efficiency LEDs high 20.32mm (0.8")  
(顯示幕)
- Sensor power supply : 12VDC±3%(<60mA)  
(感應器電源)
- Memory mode : Non-volatile E<sup>2</sup> PROM memory  
(記憶方式)
- Dielectric strength : 2KVac/1 min. (input/power/display)  
(絕緣耐壓能力)
- Operating condition : 0~50°C (20 to 90% RH non-condensed)  
(使用環境條件)
- Storage condition : 0~70°C (20 to 90% RH non-condensed)  
(存放環境條件)
- CE EMC Certification : EN 55022:1998/A1:2000 Class A  
EN 61000-3-2:2000  
EN 61000-3-3:1995/A1:2001  
EN 55024:1998/A1:2001  
(CE認證)

## 3.OUTSIDE DIMENSION AND CONNECTION DIAGRAM

(外型尺寸與開孔尺寸與配線圖)

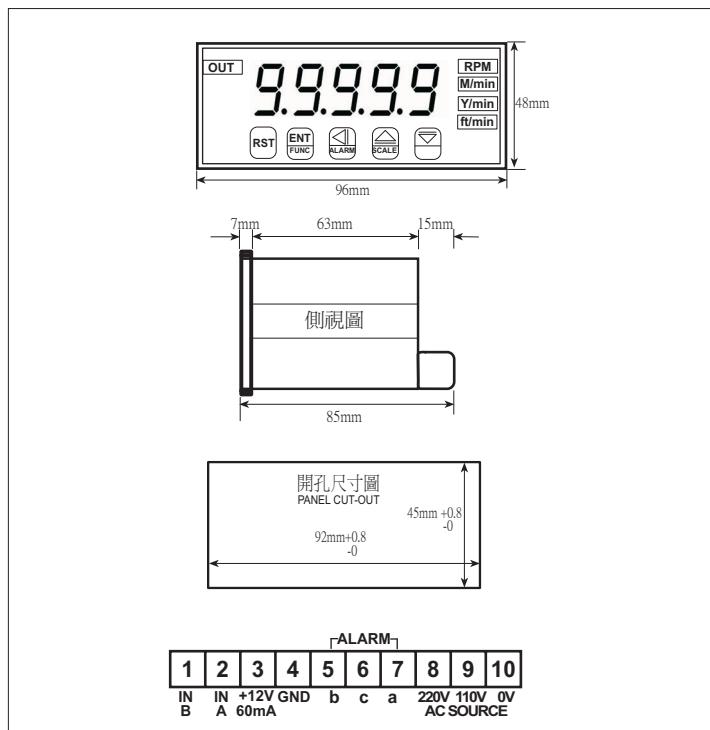

## 4.Ordering information(訂購方式)

### MODEL:MMX-LB0

- Input Type : Pulse (NPN) (12V)  
(脈波輸入型式)
- Display unit : RPM  
(顯示值單位)
- Alarm output : None  
(警報功能)